

机器的构架大而牢固，
 齿轮箱安装在两块钢板之间，避免了
 操作过程中的松动
 立柱和刀具轴的额外高度可以适应最
 大宽度为381mm的轮胎操作。

The frame is large and reinforced, to grant the utmost rigidity to the structure and chucking table.
The gear box is installed between two steel plates, to avoid flexion during operation.
The extra height of the vertical post and tool shaft allow operation on tyres to a max. of 15" (381 mm) width.



10" -24"
 转盘的夹具位置可以调节
 (具有两个插槽)
Chucking table with adjustable positioning of clamps (2 slots).



10"-20" / 11"-22"
 标准的转盘
Standard chucking table.



**GA2641.22
 + PLUS73**

| | IN | OUT |
|------------------|-----------|---------|
| GA2641.24 | 12"-26,5" | 10"-24" |
| GA2641.22 | 13"-24,5" | 11"-22" |
| GA2641.20 | 12"-22,5" | 10"-20" |

自动拆胎机

Automatic
 Tyre Changers

- 1 操控手柄**
坚固并符合人体工学
距离轮辋适当距离自动锁定

Controls

- *Sturdy and ergonomic handle.*
- *Tool locking with automatic setting of appropriate distance from the rim.*

- 2 鸟头**
良好保护合金轮辋
可调整角度和旋转



Tool

- *Tool with integrated protection for alloy rims*
- *Adjustable angle and rotation.*

- 3 滚轴**
定位过程中促进手臂的移动

Roller

- *To facilitate arm movement during tool positioning.*

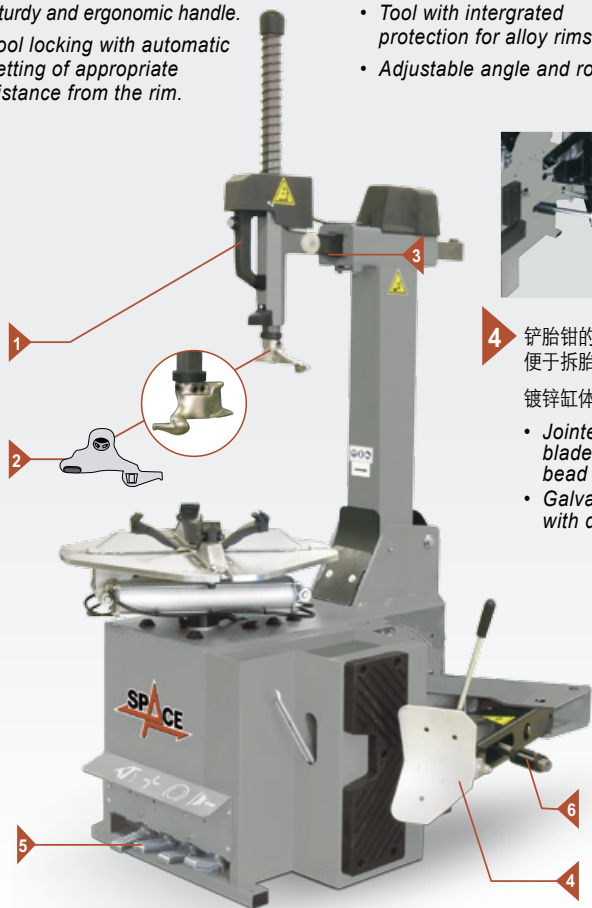

- 4 铲胎钳的连接和形状设计**
便于拆胎

镀锌缸体

- *Jointed and shaped blade to facilitate bead breaking.*
- *Galvanised cylinder with double operation.*

- 5 踏板**

压铸铝材质
踏板可以作为整体拆除，
拆解方便

Pedal assembly

- *Pedals in press-cast aluminium.*
- *The pedal assembly can be removed as an integral unit allowing easy servicing.*

- 6 拆胎钳**

可以调节开度适应不同的工作
速度，提高速度

Bead breaker

- *The bead breaker opening can be adjusted to work with extreme rapidity.*

选配件



G800 A11

保护层
Bead breaker
protection



**G800A98 →
20"-22" (4 x kit)
G800A6 → 24"
(4 x kit)**

夹具保护件
Clamp protections



G800A117 (2 x kit)

鸟头护套
Tool protection kit



| 技术参数 | TECHNICAL DATA | GA2641.24 | GA2641.22 | GA2641.20 |
|------------------|---|-------------------|-----------|-----------|
| 电机 | Motor | 3 Ph. / 0,81.1 kW | | |
| 转盘转速 转速 | Chuck rotation speed (rev/min) | 7,3 | | |
| 转盘的最大扭矩 | Max. torque to chuck (Nm) | 1400 | | |
| 外卡尺寸 | Self-centring lock: external | 10"-24" | 11"-22" | 10"-20" |
| 内卡尺寸 | Self-centring lock: internal | 12"-26,5" | 13"-24,5" | 12"-22,5" |
| 鸟头工作范围 | Tool working span | 8"-24" | | |
| 最大轮胎直径 (毫米) | Max. tyre diameter (mm) | 1050 mm (41") | | |
| 最大轮辋宽度 (英尺) | Max. rim width (inches) | 381 mm (15") | | |
| 12巴的卸胎撬棒气缸 功率 | Bead breaker cylinder power at 12 bar (kg) | 3600 kg | | |
| 基本版重量 (千克) | Basic version weight (kg) | 220 kg | | |

SPACE s.r.l. a s.u.

Via Sangano, 48
10090 Trana - Torino - ITALY
tel. +39-011-934.40.300
fax +39-011-933.88.64
e-mail: info@spacetest.com
www.spacetest.com

本产品手册中的技术数据和组成可能会有所不同。

展示的图片仅供参考。
Technical data and composition presented in this
catalogue may vary.
Pictures reproduced are only indicative.