

Trana, August 1<sup>st</sup>, 2018

Dear Customers,

We are pleased to inform you that a **new release of the wheel alignment software (version 4.3.8.0)** is now available for our complete wheel alignment range (3D/WS/WD/Truck).


The new software update allows new useful functions for vehicle selection mode.

**NEW "PROVIEW" DATABANK VEHICLE SEARCH MODE**

A new more detailed vehicle selection mode is now available:

- EUROPE ProView (by Autodata)
- AUSTRALIA ProView (By Autodata)

The new "ProView" mode is closer to the Autodata web search and to the OEM classification.

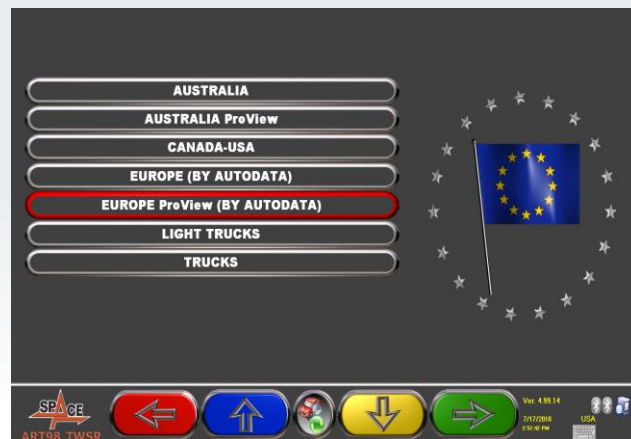

The "ProView" mode can start the selection from the Model or from the Engine Code.



RENAULT EUROPE ProView (BY AUTODATA)RENAULT  
MEGANE IV (BFB/KFB/LFF) (16-) \ 1.5D DCI 110 \

Engine power and model dotation selection

Engine code and power selection

Suspension and/or wheeldrive selection

**BY ENGINE CODE**

Engine code selection

RENAULT

RENAULT

ROVER

SAAB

SAO

K9K 646

K9K 646

K9K 647

K9K 656

K9K 657

K9K 676

K9K 677

K9K 700

K9K 702

K9K 704

K9K 706

Engine power section.

Pay attention : apparently similar descriptions could contain different models

RENAULT EUROPE ProView (BY AUTODATA)RENAULT  
K9K 646 \ 1.5D 81KW (110 CV) 4000rpm (2015-2018) \ CAPTUR

1.5D 81KW (110 CV) 4000rpm (2015-2018)

1.5D 81KW (110 CV) 4000rpm (2016-2018)

1.5D 70KW (95 CV) 4000rpm (2016-2018)

CAPTUR

CLIO IV \ HD

CLIO IV \ STD

KADJAR \ 2WD

Suspension and/or wheeldrive selection

RENAULT EUROPE ProView (BY AUTODATA)RENAULT  
K9K 646 \ 1.5D 81KW (110 CV) 4000rpm (2016-2018) \

1.5D 81KW (110 CV) 4000rpm (2015-2018)

1.5D 81KW (110 CV) 4000rpm (2016-2018)

1.5D 70KW (95 CV) 4000rpm (2016-2018)

MEGANE IV \ RAISED SUSPN.

MEGANE IV \ STD

SCENIC/GRAND SCENIC \ IV

Note: To use the new selection mode, it is required to download the new DB25 databank file (not necessarily to purchase the databank update token) and to update the software to the latest 4.3.8.0 release.


## SELECTION OF TYRE MODEL AND TYRE PRESSURE

The new ProView vehicle section mode allows to select also the exact rim dimensions and tyre model including the relevant tyre pressure.

By selecting F3  on the manufacturer's vehicle data page, it is possible to visualize and select the possible tyre models and relevant pressure of the selected vehicle model.

Please note :

It is still possible to manually set the rim dimensions by selecting the F5 button





RENAULT		EUROPE ProView (BY AUTODATA)RENAULT				
		K9K 646 \ 1.5D 81KW (110 CV) 4000rpm (2016-2018) \ MEGANE IV \ RAISED SUSPN.				
Rim size	Wheel size	Model	Unladen - bar (psi)		Laden - bar (psi)	
			Front	Rear	Front	Rear
<b>T145/70 R 17</b>			4.2 (61)	4.2 (61)	4.2 (61)	4.2 (61)
205/50 R 17 89V			2.9 (42)	2.6 (38)	2.9 (42)	2.6 (38)
225/45 R 17 91W			2.9 (42)	2.6 (38)	2.9 (42)	2.6 (38)
225/45 R 17 91W			2.4 (35)	2.1 (30)	2.6 (38)	2.3 (33)
205/50 R 17 89V			2.3 (33)	2.1 (30)	2.3 (33)	2.1 (30)
205/50 R 17 89V		<b>TOURER</b>	2.3 (33)	2.1 (30)	2.4 (35)	2.2 (32)
225/40 R 18 92Y			2.4 (35)	2.1 (30)	2.6 (38)	2.3 (33)



The selected data are visualized in the vehicle technical data page.

Tyre pressure values :

FRONT

-  unloaded
-  loaded

REAR

-  unloaded
-  loaded

RENAULT		EUROPE ProView (BY AUTODATA)			
		K9K 646 \ 1.5D 81KW (110 CV) 4000rpm (2016-2018) \ MEGANE IV \ RAISED SUSPN.			
	Total toe	mm	-2.69	-1.35	+0.00
	Front camber	Deg	-0.85°	-0.35°	+0.15°
	Caster	Deg	+3.88°	+4.88°	+5.88°
	SAI	Deg	+12.92°	+13.50°	+14.08°
	Incl.angle	Deg	---	+13.15°	---
	Total toe	mm	+0.71	+2.93	+5.15
	Rear camber	Deg	-1.34°	-1.12°	-0.90°
	Thrust angle	Deg	-0.25°	+0.00°	+0.25°

All the above data are reported on the final test printout

**ART98 TWSR** Date: 7/18/2018 11:13:04 AM

Lic number: [redacted] V.I.N.: [redacted] Vehicle make: RENAULT  
 Chassis n.: [redacted] Vehicle model: MEGANE IV RAISED SUSPN (2016 - 2018)  
 Rim diam.: 18"

	Target values	Diagnosis	Adjustment
Total toe	mm -2.69 -1.35 +0.00	-0.60	-0.60
Fr. toe partial	mm -1.35 -0.67 +0.00	-2.00	-1.20
Front camber	Deg -0.85° -0.33° +0.15°	-1.80°	-0.90°
Center	Deg -1.38° -1.48° -1.58°	-1.80°	-1.80°
SAI	Deg +12.20° +13.50° +14.80°	---	---
Red angle	Deg +13.15° +13.15° +13.15°	---	---
Toe-out on turns (20°)	Deg	---	---
Steering in	Deg	---	---
Steering out	Deg	---	---
Total toe	mm +0.71 +2.93 +5.15	+5.20	+5.20
Rear toe partial	mm +0.76 +1.47 +2.27	+4.20	+1.10
Rear camber	Deg +1.34° +1.13° +0.90°	+0.52°	+0.32°
Thrust angle	Deg -0.25° +0.00° +0.25°	+0.19°	+0.19°

MEGANE IV (DFB/R/BL/FP) (16-) | 1.2 TCE 100 | 16V | 408 | 78KW (101 CV) 4500rpm R-Cat (2016-2018) | MEGANE IV | RAISED SUSPN  
 235/40 R 18 CVT 2.9 (42) 2.6 (30) 2.9 (42) 2.6 (30)

The standard selection mode remains fully available (i.e. EUROPE by Autodata).

AUSTRALIA  
 AUSTRALIA ProView  
 CANADA-USA  
**EUROPE (BY AUTODATA)**  
 EUROPE ProView (BY AUTODATA)  
 LIGHT TRUCKS  
 TRUCKS

We remain fully available should you need any further information and/or clarifications on the above.

Best regards

Space s.r.l. // Export Department